ROCK HARD™
Step 1 - Stone Hardener
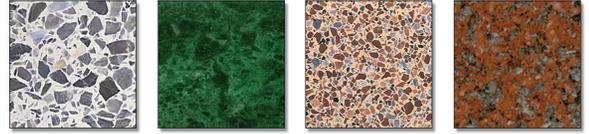
DESCRIPTION

ROCK HARD is the first step of a synergistic two-step polishing and maintenance program for all types of terrazzo and natural stone. ROCK HARD works to harden the surface of terrazzo, marble and granite. Then, with the use of NCL-2 SURFACE CRYSTALLIZER, an easy-to-maintain, super high gloss is produced on the surface. Terrazzo (both cementitious and resinous) will be improved with this process. It is recommended for polishing hard marble surfaces (such as serpentine} and most types of granite. It works to form a protective layer at and below the surface. Continued use of this product will increase the density of the surface. This will make the surface more resistant to wear and staining.

DIRECTIONS FOR USE

SURFACE HARDENING: The surface must be dry and free of any coatings, grease or oil. Remove any floor coatings by using approved floor stripper; greases or soils should be removed with HURRICANE™ Intensive Stone Cleaner. Mist 4 trigger pulls of ROCK HARD™ - Step 1 onto a 9 Sq. Ft. (1 Sq. m) area. Buff with an AQUA MAGIC'" pad until dry. Repeat this process 1-2 more times until a slight gloss is achieved. Best results are obtained using the STONE BLAZER™ Floor Machine with a total weight between 140-180 lb. It may be necessary to repeat this 3-4 times on very porous stone or cementitious terrazzo.

Then mist 3 more trigger pulls of ROCK HARD™ Step 1 and buff with a Steel Wool pad until the surface is dry. Repeat process until surface has a moderate gloss at a 60° angle. The surface is now prepared for using NCL-2 SURFACE CRYSTALLIZER. NOTE: If moisture is present, the Steel Wool pad may leave a dark transfer. Use an AQUA MAGIC™ or similar light natural hair pad and buff ROCK HARD until dry.

COVERAGE: For ROCK HARD: 25,000 - 30,000 Sq. ft. (2,300 - 2,800 sq. m) per gallon.

SPECIFICATIONS

Color	Colorless	Density (lbs/gal)	8.8 ± 0.1
Odor	Odorless	Freeze-Thaw Stable	Yes
pH (Concentrate)	2.3 ± 0.2	Flash Point	None
Solubility	Disperses	Biodegradable	Yes
Specific Gravity (g/cc)	1.06 ± 0.01	Shelf Life	1 year minimum in original unopened container

SAFETY INFORMATION

DANGER: HARMFUL IF SWALLOWED. CAUSES SERIOUS EYE DAMAGE. CAUSES SKIN IRRITATION. MAY CAUSE RESPIRATORY IRRITATION. KEEP OUT OF REACH OF CHILDREN.

Precautionary Statements:

Prevention: Do not breathe mist or vapor. Wear protective gloves/protective clothing/eye protection/face protection. Wash hands thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area.

Response: If swallowed: Rinse mouth. Do NOT induce vomiting. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. Wash contaminated clothing

before reuse. If inhaled: Remove person to fresh air and keep comfortable for breathing. Immediately call a poison center/doctor. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

Storage: Store locked up.

Disposal: Dispose of contents/container in accordance with local/regional/national/international regulations.

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

For Commercial and Industrial Use Only

CLASSIFIED UL Floor Coating and Finishing Material As to Slip Resistance Only 18EL

NCL® World Class Cleaning & Hygiene Solutions™

401 N. 10th Street • Philadelphia, PA 19123
1-800-NAT-CHEM • 215-922-1200 • FAX: 215-922-5517
www.nclonline.com • e-mail:info@nclonline.com

TDS-2506-0522