



World Class Cleaning & Hygiene Solutions®

- Advanced Finish
- Ultra High Solids
- Long Term Clarity
- Abrasion Resistance

Education



Retail



Government



Hospitality



24/7®

Extended Performance Floor Finish



24/7[®]

Extended Performance Floor Finish Product #0593

DESCRIPTION

24/7 is a new, highly advanced floor finish with superior "off-the-mop" initial gloss. This ultra-high solids formula provides exceptional film clarity, repels soil and scratches, and extends the time between stripping cycles from 18 to 36 months. A wet-look gloss floor finish incorporating proprietary polymer technology producing outstanding long-term clarity, excellent abrasion resistance and extended durability. Excellent scrub and re-coat performance easily extends the time between stripping cycles from 18 to 36 months.

PRODUCT FEATURES / BENEFITS

- Easy to Apply / Dries quickly, levels beautifully, no re-coat attack.
- Ultra-High Solids / Save time and labor with fewer coats
- Scuff, scratch and abrasion resistant / Minimizes maintenance requirements
- Repels Dirt / Stays clean, clear and bright longer
- Highest "Off-The-Mop" Gloss / Floors look beautiful, right from the start.
- Excellent Burnish Response / Easily maintain wet-look gloss for extended period of time.
- Exclusive Micro Molecular Technology/ Superior durability, extremely consistent surface excel at long term performance.

DIRECTIONS FOR USE

Floor Preparation: Strip old finish and wax using your preferred NCL floor stripper following label directions. For baseboards and corners, use an NCL baseboard stripper following label directions. If necessary, rinse thoroughly with clean water and allow to completely dry.

Application: Using a clean mop or applicator apply a thin uniform coats of 24/7 Extended Performance Floor Finish. Allow to dry for a minimum of 30 minutes after each coat. Do not apply more than 4 coats in a 24 hour period. Floor should be thoroughly dry before traffic is allowed in area.

Buffing and Burnishing: 24/7 Extended Performance Floor Finish is an ideal for use in no-buff or buffing programs using all speeds of buffing or burnishing machines. Prior to buffing or burnishing dust mop the floor surface using an NCL dust mop treatment. Buff or dry burnish using an NCL Aqua Magic buffing pad. For spray buffing, mop-on or autoscubber restoring use a preferred NCL gloss restorer.

Routine Maintenance: Dust mop using mop treated with an NCL dust mop treatment. Damp mop or clean with an automatic scrubber using your preferred NCL neutral floor cleaner following label directions.

Scrub and Recoat: When routine maintenance and buffing/burnishing no longer responds as needed, scrub and recoat using an NCL scrub and recoat cleaner following label directions.



FLOOR CARE

Floor Coating and Finishing Material
As to Slip Resistance Only
18EL



SPECIFICATIONS

| | |
|--------------------------------|-----------------------------------------------|
| Type | Pure acrylic polymers |
| Coverage (sq. ft / gal)..... | 2,500 - 3,000 |
| pH | 8.2 ± 0.3 |
| Drying Time (minutes)..... | 30 |
| % Styrene (Free Monomer) | 0.0 |
| Specific Gravity (g/cc) | 1.03 ± 0.01 |
| Color | White, opaque liquid |
| Odor | Typical acrylic |
| Powdering | None |
| Flash Point..... | None |
| Slip Resistant..... | Yes |
| Shelf Life | 1 year minimum in original unopened container |

SAFETY INFORMATION

KEEP OUT OF THE REACH OF CHILDREN.

Precautionary statement

Prevention: Observe good industrial hygiene practices.

Response: Wash thoroughly after handling.

Storage: Store away from incompatible materials.

Disposal: Dispose of contents/container in accordance with local/regional/national/international regulations.

This product is not known to be a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

Additional safety measures:


Read the entire label and SDS before using this product, and for additional first-aid measures. SDS for this product is available on the web at www.nclonline.com

KEEP FROM FREEZING

For Commercial and Industrial Use Only

| Product | Code # | Packaging | Weight | Cube | Units per Pallet (Layers/Total Cases) |
|--------------------------------------------------------|---------|---------------|----------|-------|------------------------------------------|
| 24-7 [®] Extended Performance Floor Finish | 0593-32 | 55 Gal. Drum | 500 lbs. | 11.00 | 1/4 |
| | 0593-21 | 5 Gal. Pail | 45 lbs. | 1.04 | 12/36 |
| | 0593-29 | 4/1 Gal. Case | 37 lbs. | 1.13 | 12/60 |

Available only through your NCL Authorized Local Independent Distribution Partner

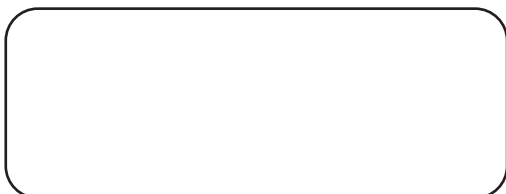

World Class Cleaning & Hygiene Solutions[®]

401 N. 10th Street • Philadelphia, PA 19123 USA
1-800-NAT-CHEM • 215-922-1200 • Fax: 215-922-5517
www.nclonline.com • sales@nclonline.com